



# Masterpiece On-Wall Frame Installation Instructions

**Please Note:** In addition to the speaker grilles, Masterpiece On-Wall Frames have a paintable finish. We recommend that the grille and frame be painted prior to completing the installation.





MASTERPIECE SERIES

## Icon 3XW | Tribute 5XW

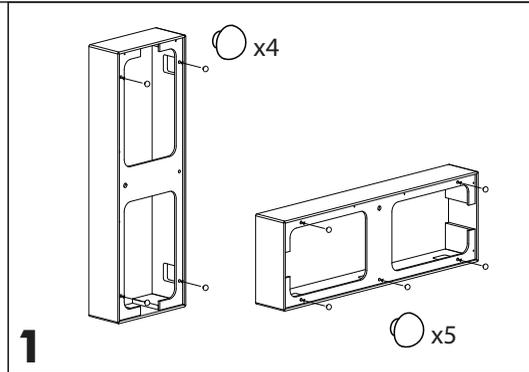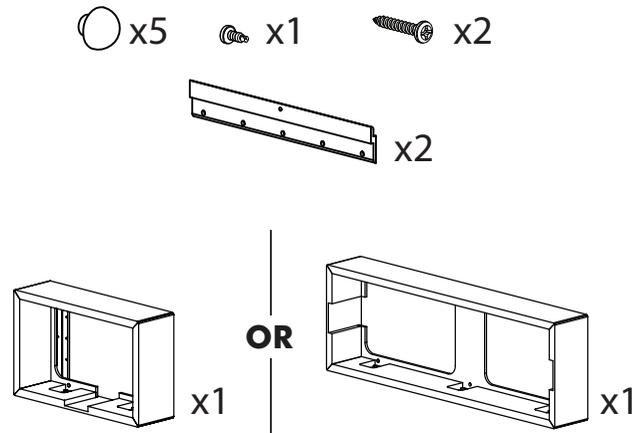


The Icon 3XW and Tribute 5XW On-Wall Frame can be used in either a vertical or horizontal orientation. (4) rubber bumpers need to be installed on the back of the frame when used in a vertical layout, and (5) bumpers will be required when used horizontally. These bumpers are designed to help protect the wall finish and help eliminate any unwanted noise caused by surface to surface contact between the frame and wall.


## Monument 7XW

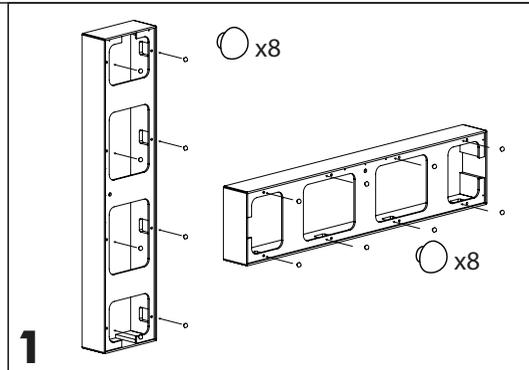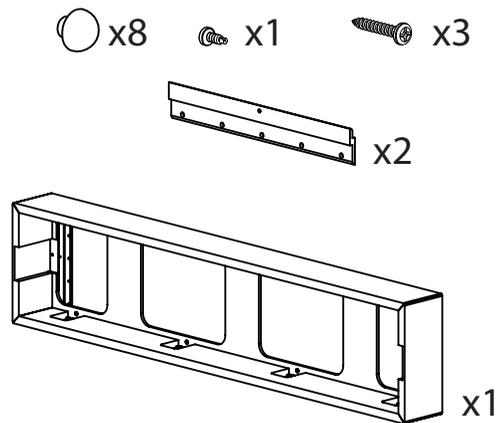

The Monument 7XW On-Wall Frame can be used in either a vertical or horizontal orientation. (8) rubber bumpers need to be installed on the back of the frame when used in either orientation. These bumpers are designed to help protect the wall finish and help eliminate any unwanted noise caused by surface to surface contact between the frame and wall.

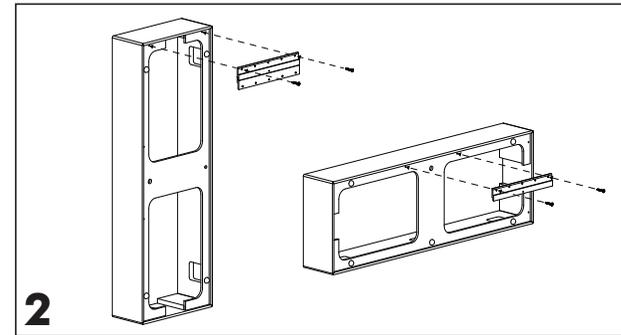


Attach (1) bracket to the back of the On-Wall Frame in the desired orientation using (2) screws. Please Note: Attaching the bracket to the Monument 7XW On-Wall Frame in the horizontal orientation will require (3) screws.

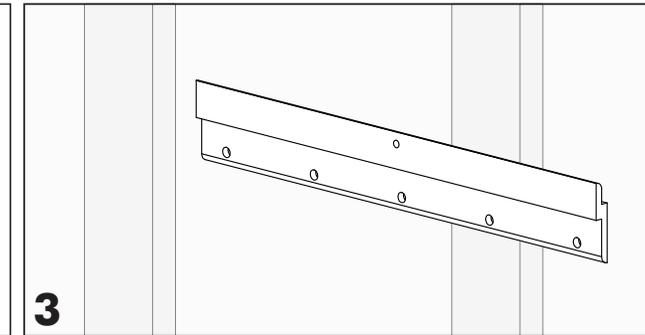


Secure the second included bracket to the wall. We recommend securing this bracket into at least one stud in conjunction with another attachment method. If the chosen location does not allow stud attachment, we recommend using toggle bolts. Your unique installation requirements may require an alternative solution.

*Please consult a licensed contractor if you are unsure about what is required for your installation.*

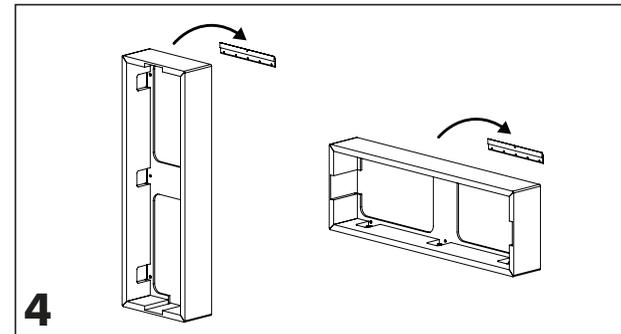


Hang the On-Wall Frame on the wall mounted bracket by aligning the (2) brackets. Please Note: The bracket attached to the On-Wall Frame will need to be lifted slightly above the bracket on the wall so it can drop down into the bracket affixed to the wall surface.

*See next step for finished result.*

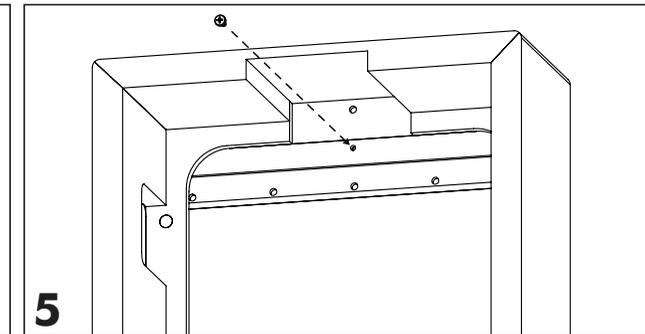


Insert (1) included sheet metal screw through the hole in the bracket to secure the frame to the wall.

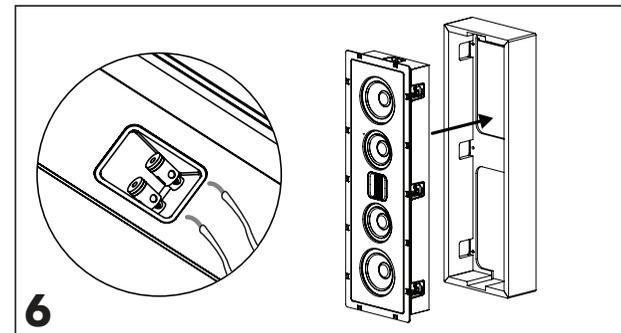

Pull the wires designated for the speaker through the On-Wall Frame and attach them to the binding posts of the speaker. Be careful to maintain proper polarity (Red (+) to Red, Black (-) to Black). Then place the speaker in the frame. Tightening all the mounting locks securing the speaker into the frame.

*Please Note: If your installation does not allow for in-wall wiring, the speaker wire can be routed into the frame directly by drilling a small hole in the frame as close to the wall surface as possible.*

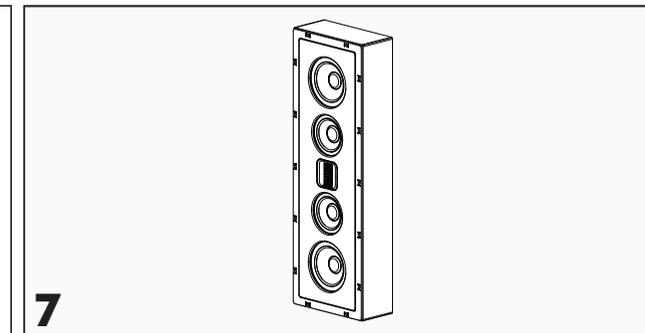

Installation is now complete. The grille may now be attached.